


S100 Series Sight Glass

Application – Sight Glass; WP 3000 psig at -20° F to +73° F

- Use in applications where visual indication of liquid level is needed
- Provides visual indication on Level Controls or Safety Systems
- May be used with Pathway External Cage Models C300 and C303 and other applications using a 1½” or 2” NPT connection
- Use on production separators, heaters/treaters, scrubbers, liquid accumulators & other process vessels

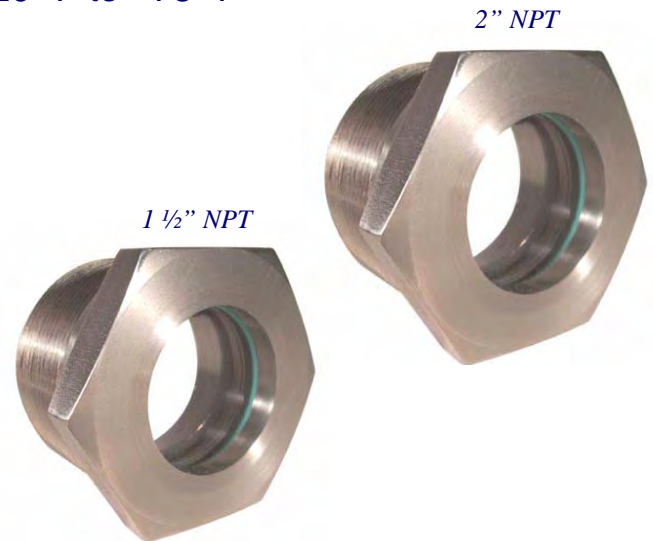

Features

- Durable body constructed of 303 SS or 316 SS
- Clear polycarbonate window
- Purchase separately or together with Pathway Pneumatic or Electric Level Controls and External Cages

Specifications

Working Pressure: Pressures up to 3000 psig from -20° F to +73° F, 2000 psig at -40° F, 2650 psig at +100° F, 2020 psig at +150° F, 1000 psig at +230° F max temp


Materials: 303 SS standard, 316 SS; polycarbonate lens

Connections: 1½” NPT, 2” NPT

Ordering Chart:

S100: Sight Glass	→	
Body Style:		
0	→	1½” NPT Connection
1	→	2” NPT
Body Type:		
1	→	303 SS standard
2	→	316 SS
Lens Type:		
0	→	Polycarbonate standard
Other:		
0	→	No other options
5	→	Other special materials

Example:

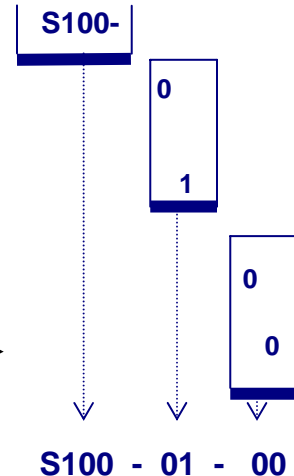

Example as Selected